



## New

# Makes slatted bed frames functional and space-saving **Folding hinge**




#### Can be folded in order to save space

- ▶ The folding hinge permits the folding of slatted bed frames up to a recommended width of 1000 mm.
- ▶ Important saving of transport costs:
  When the bed frame is dispatched by post, about 70 % of the transport costs that usually occur for the transport by freight forwarder can be saved.
  Possible parcel sizes: length 1100 x width 1000 x height 180 mm.
- Quick and easy assembly of the 2 bed frame halves without any major assembly work.
- ▶ The folding hinge is factory assembled by the manufacturer of the slatted bed frame. The end user only needs to unfold the bed base, block the hinges, and that's it.
- ▶ Suitable for all types of slatted bed frames, whether non-adjustable, manually adjustable or motorised.

#### Technical details at one look

- ▶ Tested according to DIN EN 1725
- ▶ The folding hinge has a high loadbearing capacity. There is no need to install any additional supports or wooden strips in the bed frame.
- ▶ The hinge in the unfolded condition needs to be screwed on by means of two safety screws (countersunk head) M6 x 30 mm in order to achieve the required stability and safety.
- ► The folding hinge is universal and can be used on the left and right hand sides.
- ► The wooden rails of the slatted bed frame do not need to be cut out.

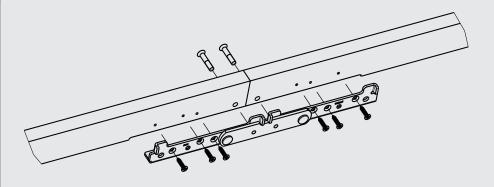



We recommend fixing each folding hinge on the outer rail (subject to a thickness of 20 mm) by means of 3 wood screws (M4.5 x 20 mm) and additionally by 2 countersunk screws M6x30 mm.



### Folding hinge for slatted bed frames

- ▶ Slatted bed frame with folding hinge
- Drawing

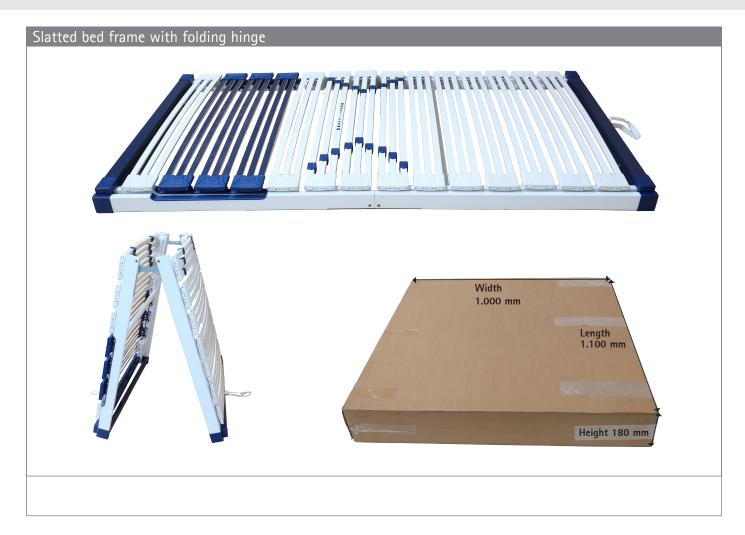

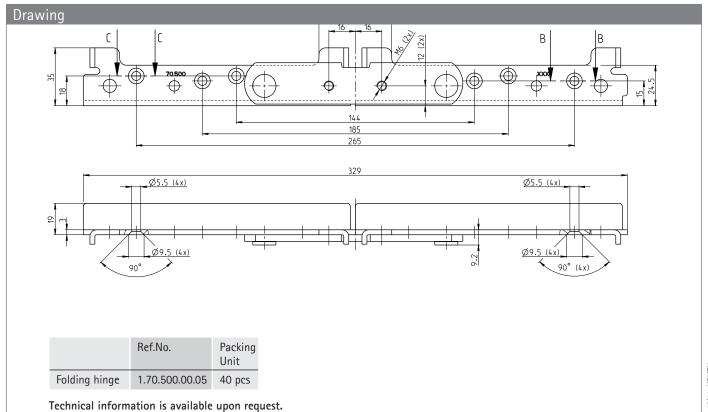

Hettich Franke GmbH & Co. KG · Hinter dem Ziegelwasen 6/1 · 72336 Balingen · Germany Phone: +49 7433 3083-0 · Fax +49 7433 3083-44 · E-Mail: info@de.hettich-franke.com · www.hettich.com Folding hinge\_07/18\_HBL/EN © Hettich Franke GmbH & Co. KG Subject to technical modifications